


JRPSMC06

Intel Raptor Lake-S 2DIMMS Desktop Motherboard

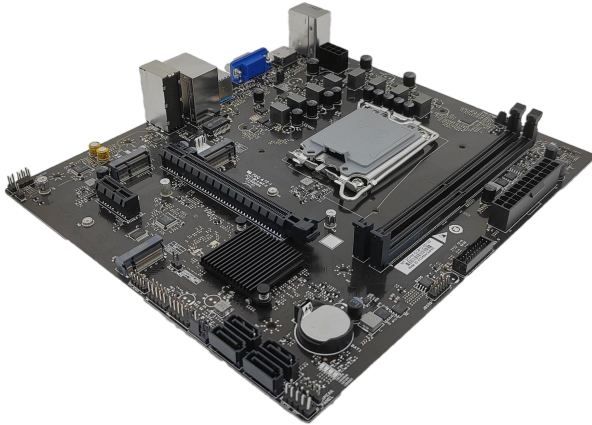


- Intel Raptor Lake B760 & Alder lake H610
- MATX: 207 x 235mm
- 2 x U-DIMM DDR5, support OC
- 2 x M.2 2280/2242 SSD, 4 x SATA Gen3 Port
- 10 x USB2.0/3.0
- M.2 WIFI Slot
- Displays: 1 x VGA, 1 x HDMI
- Gigabit Ethernet Card, support LAN wake-up
- 6 + 1PHASE power supply, CPU 125W


01 Specifications

CPU	Support Intel12/13th CPU, CPU MAX 125W
Chipset	B760 colay H610
Graphics Card	PCIe/onboard
RAM	2 x U-DIMM DDR5, Max 64G, OC Max support 6000MHz+
OS	WINDOWS 11
BIOS	AMI
Memory	2 x M.2 2242/2280, support PCIE GEN4 X4 4 x SATA Gen3 Port
Audio	HD Audio IC, 5.1CH
Network	1 x 1000M Ethernet Port 1 x M.2 WIFI Horizontal slot
Display	1 x VGA, 1 x HDMI
Audio I/O	1 x Line in, 1 x Line out, 1 x Mic in; 3.5mm Audio Jack 1 x 9pin, 2*5-1 2.54mm
USB	Rear IO: 2 x USB2.0, 4 x USB3.0 Gen1 (H610: Only 2 x USB3.0 Gen1) Onboard: 2 x USB2.0, 2 x USB3.0 Gen1
COM	1 x 9pin, 2*5-1 2.54mm
Expansion Slots	1 x PCI Express4.0 x16 slot, 1 x PCI Express3.0 x1 slot
Front Panel	1, 2*5pin-1 (2.54 Needle)
Other	FAN: 1 x CPU fan 4Pin, 2 x chassis fan 4Pin 1 x speaker 4Pin, 1 x ESPI_HEADER 2*5Pin, 1 x JBIOS_TPM 2*6Pin-1, 1 x CLR_CMOS 3Pin
Power Input	24PIN + 8PIN power port
Dimensions	Micro ATX, 207 x 235 mm
Working Temp.	-5~50°C
Working Humidity	10%~90% non-condensing
Storage Temp.	-20~70 °C
Storage Humidity	5%~95% non-condensing

Product view

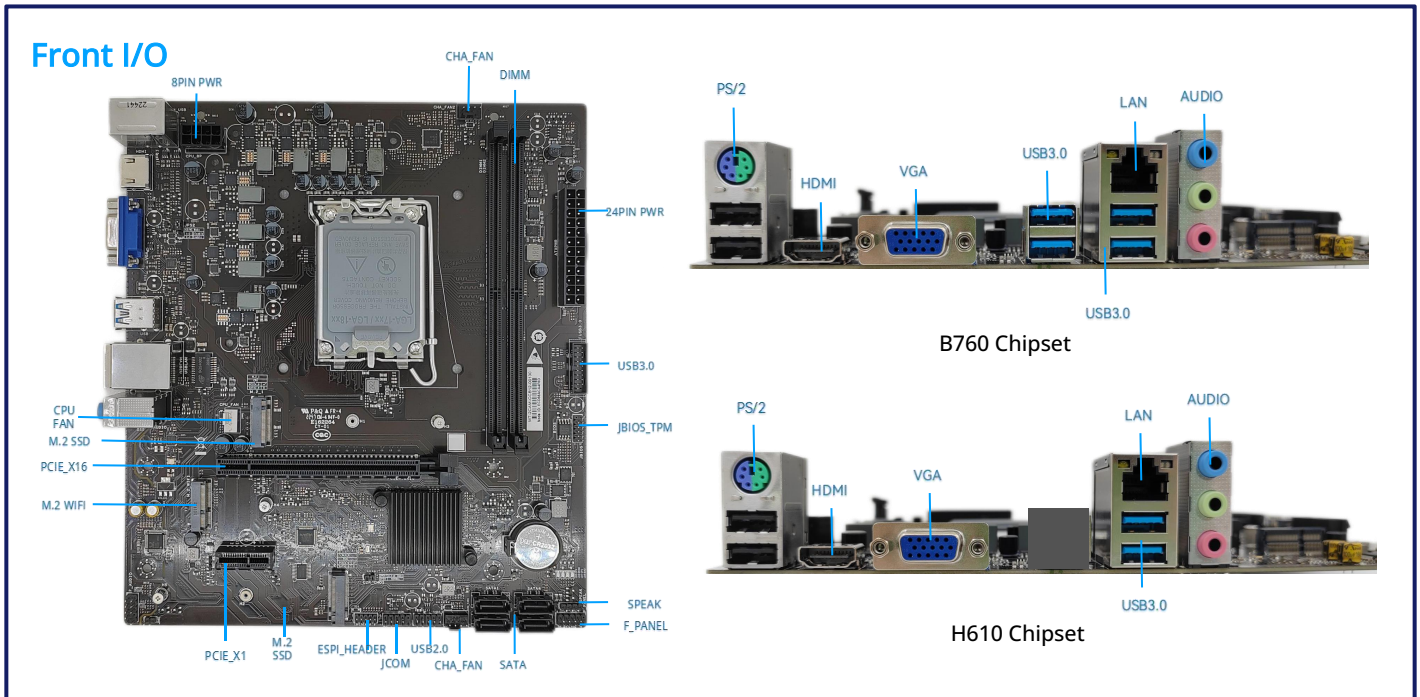

Dimensions

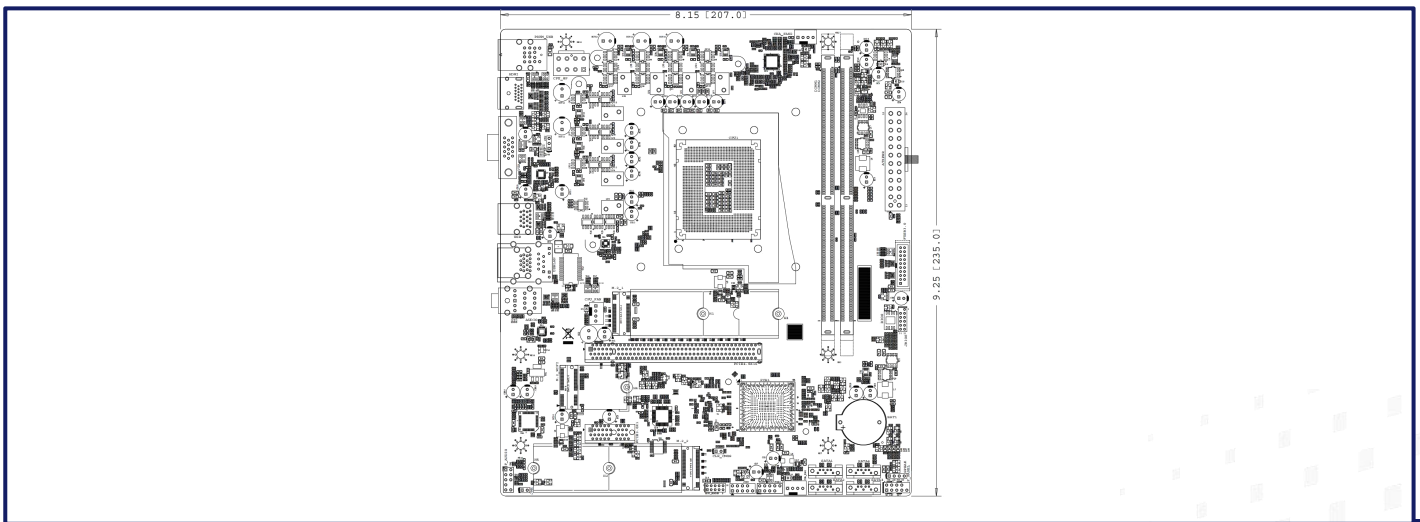

Product Selection

Model	Configuration
JRPSMC06 V1.0	B760 (65W)/1 1000M/6 USB3.0(5G)/4 USB2.0/WIFI/VGA+HDMI
JRPSMC06 V1.0	H610 (65W)/1 1000M/4 USB3.0(5G)/4 USB2.0/WIFI/VGA+HDMI