

TDS-215

Industrial Monitor




Features

- 21.5-inch LED backlit display , resolution 1920x1080
- Full viewing angle display, optional capacitive / five-wire resistive touch screen, capacitive screen supports 10 -point touch
- Support VGA HDMI DVI display interface
- 12-36v wide voltage input
- Support 2xspeakers with 3W amplifier




Product View

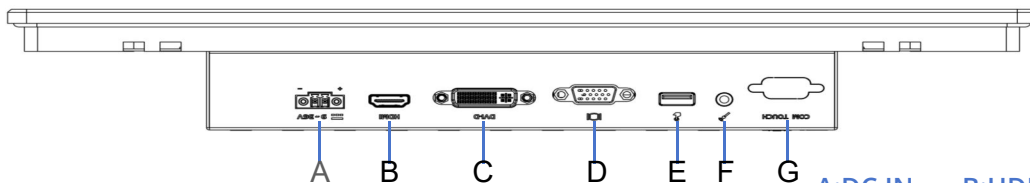

A:DC IN B:HDMI C:DVI-D D:VGA
E:USB touch interface F:Audio
G:Touch -RS232(Optional)

Dimensions

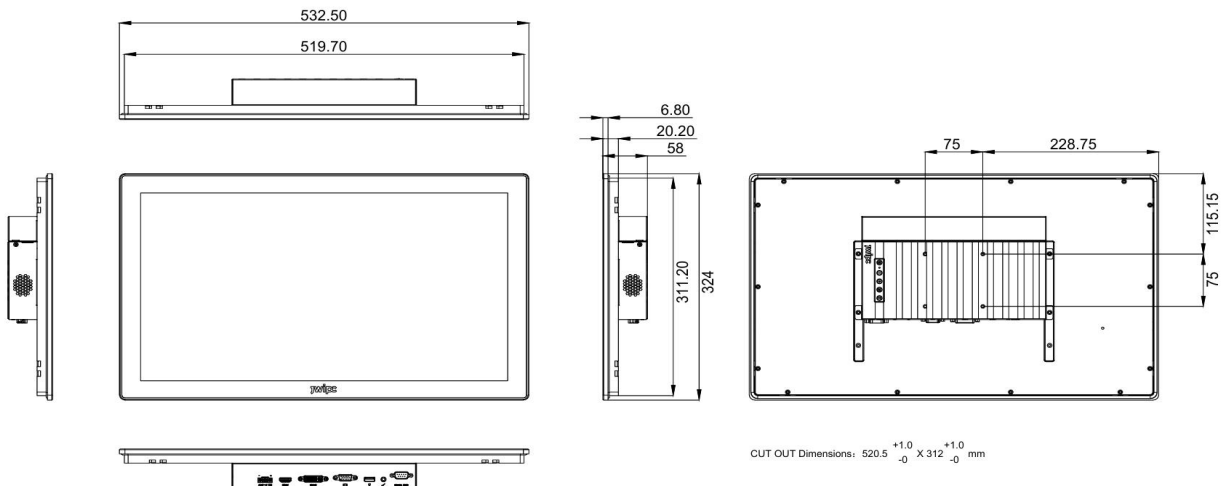

LCD Display	Proportion	16: 9
	Resolution	1920 x 1080
	brightness	220 cd/m2
	Contrast	1000:1
	Backlight life	30,000 hours
	Perspective	89 (left), 89 (right), 89 (top), 89 (bottom)
touchscreen	type	10 point capacitive touch screen (optional 5- wire resistive touch screen)
	Light transmittance	More than 81%
	life	50 million times
Power Requirements	Input voltage	DC 12-36V, RVP/SCP/OVP/OCP
	power	<25W
Driver board	Signal input	HDMI, VGA, DVI-D
	OSD Menu	Menu / Up / Down / Auto Adjust / Power Switch Brightness , contrast , screen settings , color temperature , language settings
Mechanical	size	532.5x324x58mm
	weight	TBD
OS	OS	Windows 7, Windows 8, Windows 10, Windows 11, Linux
environment	Operating temperature	0 ~ 50 °C (32 ~ 122 °F)
	Working relative humidity	95% @ 40 °C (non-condensing)
	Storage Temperature (NOP)	-20 ~ 60 °C (-4 ~ 140 °F)
	Impact resistance (OP)	15g 11ms half sine wave
	Anti-vibration (OP)	5~500 Hz 1Grms
	EMC	CE Class A
	IP Rating	IP65 front panel

Model	Touch screen type	Resolution	Audio Input	USB touch interface	VGA	HDMI	DVI-D
TDS-215C	Capacitive screen	1920 x 1080	1	1	1	1	1
TDS-215A	Five-wire resistive touch screen	1920 x 1080	1	1	1	1	1

■ Packing List

Part Number	Describe
300600016156	Power adapter , DA-90J19, 90W, AC100~240V, 19V, 4.74A, Phoenix terminal , CCC/CE/FCC, 0~40°C, PK, APD
301800000605	Flat Cable,Power , External power cable - L=1.5M, National standard three-plug XBH-G31 with plum blossom tail XBH-2C5,RVV 300/500V,3X0.75mm ² , Black , PK,RoHS,XBH
301800000829	Flat Cable,HDMI ,HDMI 19Pin 4K Male to Male ,30AWG,L=1.8M, Black , PK,RoHS , Yongdaxin
302700002073	Certificate of Conformity , Certificate of Conformity (green triangle)

■ Optional accessories

Accessories	Describe
VGA cable	1.8M *1PCS
DVI cable	1.8M *1PCS
USB touch cable	1.8M *1PCS
trumpet	Support 2x3w speakers HDMI offline optional
Embedded buckle	Metal structure , Fixed_button,Fixed_button_Assembly,SUS304,T=3.0,24x21.7x23mm, Brushed 180 mesh , Natural color